



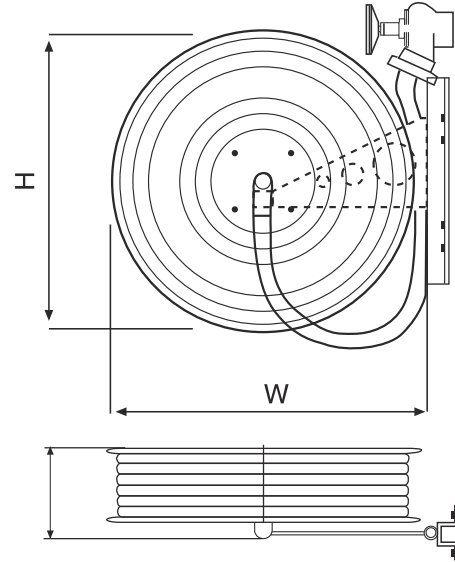

NORMEKS® model HMD fire hose reel is mounted to a hanging handle. The reel is hanged with an angle of 180°. Thus the hose can easily be pulled any direction without the need of a hose cradle.

Model HMD has the following characteristics

- Water supply is through the center of the reel.
- Hose reel is 70 micron RAL 3001 red electrostatically powder painted.
- NORMEKS jet / spray / shut-off nozzle is manufactured in accordance with pr.EN671-1.
- Semi-rigid rubber hose is manufactured in accordance with pr.EN694 Standard.
- 1" or 2" ball valve (special with 2" valve mounting adaptor.reduction with 2"-1" storz coupling)
- 3 positioned stainless brass reel core with sealing.
- Moving handle hanging on the right side of the reel (left side is available if specified)
- Reel can swing through 180°, which allows pulling the reel in any direction.
- User and installation manual.

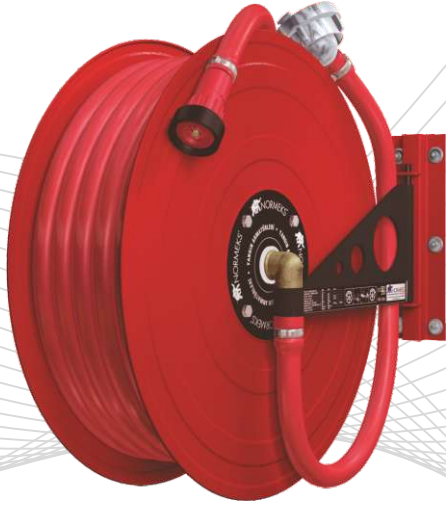


Service and maintenance of the fire hose cabinets should be performed according to service and maintenance standard pr. EN 671-3 and NORMEKS maintenance instructions. Please contact with NORMEKS for a service and maintenance contract.


- Our products are manufactured in compliance with TS. EN 671-1.
- Manufacturers shall retain the right to make changes in the production standards and material without notice.

Model	Hose		Dimension W x H x D	Order No
	Diameter (mm)	Length (m)		
HMD	25	20	640x600x190	HMD-20
HMD	25	30	640x600x190	HMD-30
HMD	25	20	640x600x175	HMD-20-20

Our Standard production color is RAL 3001, please specify separately for RAL 9002.



RAL 3001



RAL 9002

NORM
TEKNİK
Fire Protection Systems

NORM TEKNİK MALZEME TİC.İNŞ.SAN.LTD.ŞTİ.

Eyüp Sultan Mah. Ulubatlı Hasan Cad. Başkent Sok. No:6
34885 Samandıra-Sancaktepe / İSTANBUL
Tel: +90 216 311 40 41 pbx Faks: +90 216 311 90 91

www.normteknik.com.tr norm@normteknik.com.tr

www.normeks.com.tr info@normeks.com.tr

 **NORMEKS**, is a registered trademark of NORM TEKNİK LTD.ŞTİ.